

PRO-W12DX

Wideband Digital RF
Detector - 0 to 12
GHz with Memory
Log



FEATURES

- Detects the very latest covert listening, tracking, cellular, and video devices
- Ultra wide frequency response – Now up to 12 GHz with improved top end performance
- Frequency Counter 0-6 GHz for analog and digital signals
- 'Livescan' feature shows live detected signal trace
- 1000 Event Memory Log with Time & Date records all detected Burst signals & frequencies
- Live Graph Mode plots detected signals / frequencies over time
- 2.5 inch Color TFT display
- Ultra-sensitive – even at very high frequencies
- Two antennas supplied - High Gain Directional antenna and Hinged Omni Directional antenna
- Detects Digital & Analog signals
- Audio Demodulation through earphones
- Signal Strength 'Beep' and Silent Vibrate Mode
- Machined Aluminum Enclosure for maximum durability
- Internal Lithium Polymer battery pack – Charger supplied
- Supplied in Heavy Standard carry case

The **PRO-W12DX** handheld wideband RF Detector is designed to detect and locate signals from the very latest covert listening, tracking, cellular and video devices.

With a completely new hardware design the PRO-W12DX packs new features that have never been seen before in a pocket handheld RF detector.

It features a 0–12 GHz RF frequency range with unrivaled sensitivity particularly at higher frequencies for the growing threat from the latest super high-frequency devices. A new intelligent frequency-counter design has been implemented that can now display most digital frequencies as well as analog signals up to an unprecedented 6 GHz.



COMSEC LLC

4525 South Boulevard, Suite 302,
Virginia Beach, VA 23452

www.comsecllc.com

EXCLUSIVE DISTRIBUTOR - NORTH AMERICA

Phone/Fax: 800-615-0392

Email: lm1@comsecllc.com



Detected signal strength is shown on a 20 element bar graph, enabling the user to locate the precise source of any detected signal. The frequency of the detected signal can be seen simultaneously and the new 'Livescan' software shows the detected live signal pattern graphically to help identify the signal type. This can be particularly useful when searching for pulsing or burst devices such as GPS trackers.

New GRAPH – LOG Mode: The PRO-W12DX features a 1000 Event Memory Log that stores all detected signal data including any short Burst transmissions, their frequency, event time, duration, and signal strength. These events are shown in an easy-to-read list format for the user to scroll through. Events can now be viewed simultaneously in Graph-Log Mode where up to 8 minutes of live detected signal and frequency data is recorded and plotted on a graph. These memory functions ensure the user does not miss any detected events and are invaluable for helping the user determine exactly what type of signal has been detected.

Signal strength can be monitored in audible 'Beep' Mode or Silent Vibrate Mode for discreet or concealed use. Detected signals can be listened to via earphones using the Audio Demodulation function, useful when detecting conventional analog listening devices that contain microphones.

The PRO-W12DX is supplied with two antennas: a new high performance hinged omni directional antenna for general use and a high gain directional antenna for pinpointing high frequency signals at greater distance.

The PRO-W12DX is designed and manufactured in the UK to the highest specification and is enclosed in a customized machined aircraft-grade aluminum enclosure. It uses an integral Lithium-polymer battery pack and is supplied with an international charger. The complete system is supplied in a heavy duty carry case for ultimate protection.

SUPPLIED ACCESSORIES

- Adjustable hinged Antenna
- Directional High Gain Antenna
- 5V DC Charger - 110V to 240V AC input (Auto Switching) with International Adaptors
- Earphones



- Heavy Duty Carry Case



COMSEC LLC
4525 South Boulevard, Suite 302,
Virginia Beach, VA 23452
www.comsecllc.com

EXCLUSIVE DISTRIBUTOR - NORTH AMERICA
Phone/Fax: 800-615-0392
Email: lml@comsecllc.com




PRO-W12DX using hinged Omni Directional Antenna




Directional High Frequency Antenna



Live Main Screen detecting signal

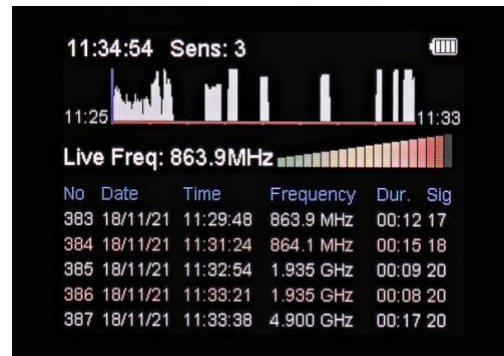

Graph Log Screen detecting pulsed signal

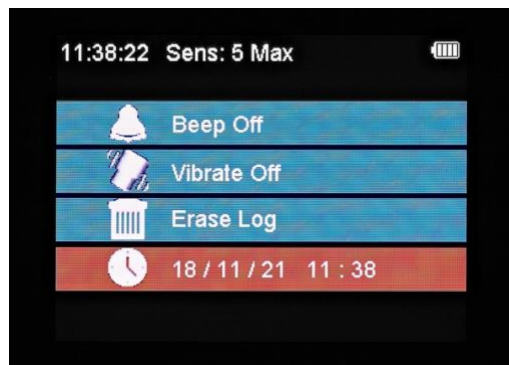

Settings Screen



Charge Socket & Earphone Socket



TECHNICAL SPECIFICATIONS

Typical Performance Characteristics - at 68 degrees F

Antenna Connector	SMA Socket - 50 Ohm
Input Frequency Range	1MHz – 12,000 MHz (12.0 GHz)
Sensitivity	100 MHz -49 dBm
	200 MHz -48 dBm
	500 MHz -47 dBm
	1 GHz -44 dBm
	2 GHz -50 dBm
	5 GHz -42 dBm
	10 Ghz -30 dBm
	12 GHz -28 dBm
Demodulation Sens. for 50mW Audio	-30dBm (measured at 500MHz 50% AM 1kHz)
Audio Frequency Response	400Hz – 5kHz +/-2dB
Display	TFT Color 2.5" High Contrast Graphic Display
Battery	Internal 3.7V 1500 mAH Li-Ion rechargeable
	Operating Duration – fully charged battery 8 hours
	Charge Time – 4 hours
Operating Temperature Range	5 – 122 degrees F, Relative Humidity < 90%
Dimensions	5.7 In x 3.1 In x 1 In (Main Unit without Antenna)
Weight	Main Unit: 0.6 lbs
	Complete System in Carry Case: 2.9 lbs
Signal Processing and Control	RISC Based Microcontroller
Memory	1000 Event Log – Time & Date – non-volatile memory
	8-minute live graph of signal data and frequency

