

WAM-X10

Wireless Activity Monitor

2G/3G/4G/5G
Signal Detection
with Worldwide
Coverage

2.4 & 5GHz
Wi-Fi/Bluetooth
Detection

Wideband
0-14 GHz
Detection





FEATURES

- Detects 2G/3G/4G and the latest 5G devices - plus Wi-Fi/Bluetooth/2.4GHz and 5GHz Devices
- Detects Mobile Phones, Smartphones, GPS Trackers, SMS (Texts), GSM Bugs, 3G/4G/5G Video, Bluetooth & Wi-Fi Devices, Store & Forward devices
- Worldwide Cellular Coverage - Simply select the relevant region
- Separate Wideband RF Detector 0-14 GHz with Frequency Counter (up to 6 GHz)
- Separate 2.4 GHz & 5 GHz band detector for Wi-Fi/Bluetooth/Video and other latest generation devices
- Increased Sensitivity across all bands - Detects signals from up to 54.7 Yards (164 Feet)
- Event Log records Time/Date, Band, Duration & Signal Strength of up to 4000 Events
- Log can be viewed on screen and downloaded to USB stick for storage/viewing on a computer
- Graph Mode plots real time or historical graph of all detected signals
- 3.5-inch Color TFT Display with easy-to-use menu driven operation
- Adjustable hinged antennas
- Audible Signal Strength 'Beep' and Silent Vibrate Mode
- Machined Aluminum Enclosure for maximum durability
- Supplied in Heavy Duty Carry Case



The **WAM-X10 Wireless Activity Monitor** is a portable multiband Radio Frequency (RF) detector for handheld use. It is designed for detection and logging transmissions from all types of radio frequency devices including mobile phones, smartphones, vehicle trackers, Wi-Fi Hotspots, GSM listening devices (bugs) and covert wireless 3G/4G/5G cameras. The WAM-X10 provides complete coverage and logging of all activity in the surrounding area.



Worldwide Cellular Band Detection

A complete ground-up redesign means the WAM-X10 now has Worldwide 5G Cellular coverage. It can be used in any environment where Radio Frequency/Cellular devices are forbidden such as sensitive meeting rooms to check for hidden devices, unauthorized mobile phone usage in offices, exam halls, hospitals, or prisons and in vehicles to locate the latest hidden tracking devices.

2.4 GHz & 5GHz Wi-Fi Detection

The WAM-X10 also has a separate 2.4 GHz band and a new 5 GHz band detector for the rapidly growing threat from Wi-Fi/Bluetooth, Store & Forward and Video devices.

Wideband Detection

The 0-14 GHz Wideband detector provides the highest range of coverage of all RF activity in the target area. The frequency of the detected signal (up to 6GHz) can be seen simultaneously and the 'Livescan'



software shows the detected live signal pattern graphically to help identify the signal type. This can be particularly useful when searching for pulsing or burst devices such as GPS trackers.

Up to 4000 events can be stored within the WAM-X10 for viewing as a list or graphically. For each detected signal (no matter how long or short) it will record the Time/Date, Duration, Band detected and Signal strength. This can be particularly useful in identifying the type of device that is being detected. For example: a string of regular short bursts in one band may represent those from a GSM/GPS Tracking device. These could be clearly viewed in Graph Mode as lines of regular spacing representing the pulsing nature of the transmission. Also, by looking at call activity at certain times of the day could help identify unauthorized phone use in sensitive areas such as prisons, company board rooms, exam halls, etc. The entire event log can also be downloaded to a USB stick for storage or transfer to a computer where it can be viewed/sorted for analysis or reporting.

For truly global use, simply select the international region the device is being used in and the WAM-X10 will detect signals from all the relevant cellular bands. This means the WAM-X10 is ready for the rollout of the latest 5G devices, worldwide. Of course, all existing 2G, 3G and 4G bands will also be covered.

The WAM-X10 features 2.4GHz & New 5 GHz Wireless real time detection for the threat from the latest generation of Bluetooth & Wi-Fi devices. Such devices can for example, record audio over long periods and then transmit it in short regular bursts. It will also detect other devices that use these bands such as wireless video. Complex algorithms analyze the detected signals to help identify the signal type i.e., Bluetooth, Wi-Fi, or other 2.4 GHz or 5 GHz signal. All 2.4 GHz & 5 GHz activity can be viewed graphically for later analysis.

A new powerful high-gain RF front end ensures detection up to 54.7 Yards (164 Feet) depending on signal strength and ambient conditions. The WAM-X10 is supplied with new adjustable hinged antennas designed for optimum performance and flexibility.




A new keypad design means operation is simple and intuitive. All information is displayed on a color TFT screen that allows the user to perform real time detection or to view events that have previously occurred. Each band has an individual 20 element signal strength meter enabling the precise source of a detected signal to be located with ease. An audible 'Beep' mode allows the user to monitor without looking at the display and a silent Vibrate mode can also be used for particularly sensitive areas.


The WAM-X10 is designed and manufactured in the UK to the highest specification and is

enclosed in customized machined aircraft-grade aluminum enclosure. It uses an integral Lithium-Polymer battery pack and is supplied with an international charger. The complete system is supplied in a compact heavy-duty carry case for ultimate protection.



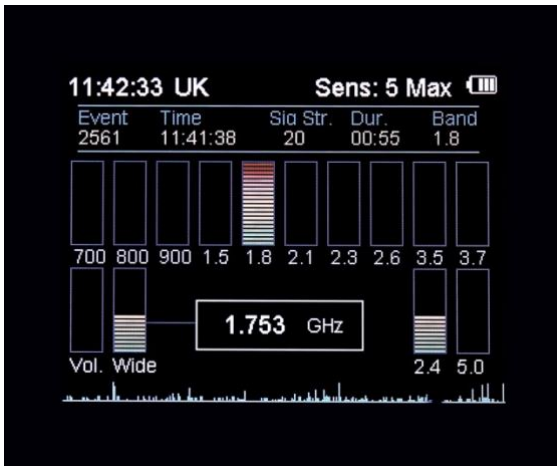

Main screen showing live detected signals

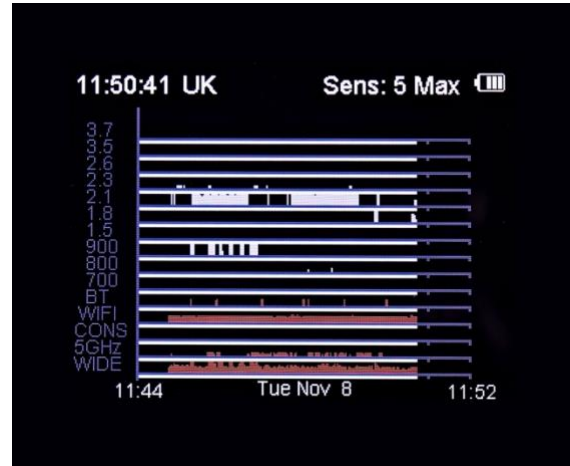

Live Graph Mode signals over 8 Minutes




Event	Date	Time	Sig Str.	Dur.	Band
2648	02/10/22	13:01:02	4	00:14	5.0
2647	02/10/22	13:01:02	13	00:20	2.4
2646	08/11/22	11:52:36	20	00:15	1.8
2645	02/10/22	13:00:41	13	00:20	2.4
2644	02/10/22	13:00:21	4	00:14	5.0
2643	02/10/22	13:00:21	12	00:20	2.4
2642	08/11/22	11:51:48	20	00:04	900
2641	02/10/22	13:00:01	13	00:20	2.4

Log Event List



Log Graph over 60 minutes

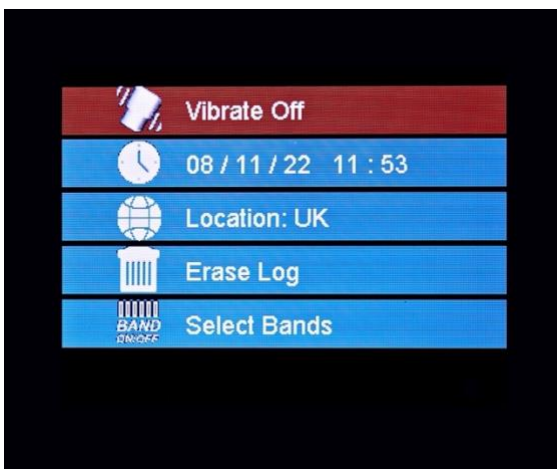

Settings Menu



USB Stick Socket for Event Log download

SUPPLIED IN PACKAGE

WAM-X10 - Main Unit

Adjustable hinged antenna x 2 + Low Frequency hinged antenna (0-800 MHz)

Directional Antenna LPA-14-SMA (Blue)

5V Micro USB Charger - 110V to 240V AC input (Auto Switching) with International Adaptors

Earphones

USB Memory Stick

High Protection Carry Case



TECHNICAL SPECIFICATION

Typical Performance Characteristics - at 68 Degrees F

Wideband Frequency Range	10MHz – 14000MHz (14.0 GHz)
Cellular Regions covered	UK, EUROPE, ASIA, AFRICA, NORTH AMERICA, SOUTH AMERICA, AUSTRALIA
Cellular Frequency Range	International bands - (300 MHz to 6 GHz) – Maximum 10 viewable bands - Sensitivity -70 dBm Max
2.4 & 5 GHz Frequency Range	2400 to 2485 MHz & 5150 to 5850 MHz
Display	TFT Color 3.5" High Contrast Graphic Display
Battery	Internal Lithium-Polymer rechargeable Operating duration – fully charged battery – up to 6 hours
Charging	Micro USB socket - Charge Time ~ 4 hours
Operating Temperature Range	+5 to +122 Degrees F - Relative Humidity < 90%
Dimensions	6.8 In. x 4.1 In. x 1.1 In.
Weight	Main Unit – 1.1 Lbs. Carry Case Complete – 4.9 Lbs.
Signal Processing and Control	RISC Based Microcontroller with real time clock
Event Logs	Maximum 4,000 RF Events
USB Socket	For USB Stick download only

MADE IN ENGLAND 

